

r27.1.4 Changelog

+-----+
| r27.1.4 Release - 181698 |
+-----+


Release day March 7th 2024

Improvements

- DSOF-26470 IP VFC: inform a user when no SFPs are connected

When using an IP-VFC card, we have added error reporting into the feed scene in the form of a tooltip for the 'Sync Mode' button.

When a user is using the PTP option in sync mode, if there is no compatible 25Gb SFP in Port 1 on the IP-VFC then the sync mode button will turn red and a message will state the Disguise media server and VFC slot number which has the invalid configuration as seen below:

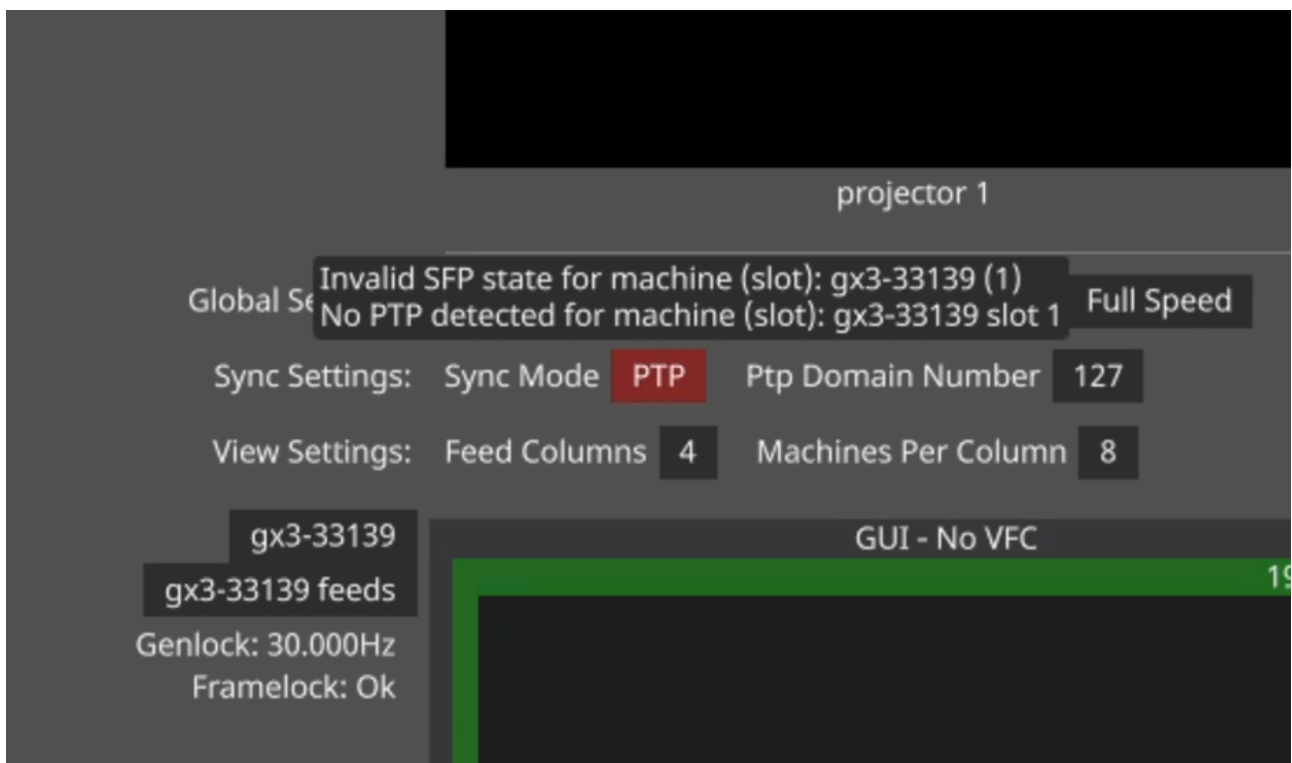

When a user is using the EXT option in sync mode, if there is no compatible single or dual SDI SFP in

Ports 3 and/or 4 on the IP-VFC then the sync mode button will turn red and a message will state the Disguise media server and VFC slot number which has the invalid configuration.

- DSOF-26538 IPVFC - change PTP_LOCKED mode name to PTP_SYNC

When using IP-VFC, we have changed the name of the PTP sync mode located under the Sync Info tab in the IP-VFC control widget from PTP_LOCKED to PTP_SYNC

- DSOF-26571 TrackJump - increase maximum section number from 32 to 1000